


Wilо-Jet FWJ

Self priming domestic pressure system

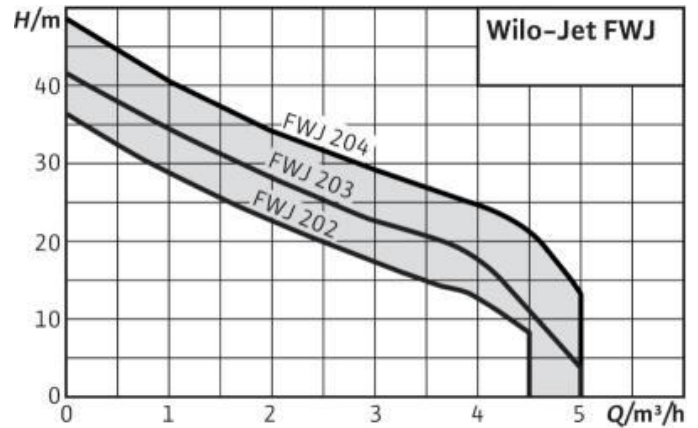

Product Advantages

- All parts in contact with fluid made from corrosion resistant material
- Automatic pump control
- Low-water cut-out switchgear
- Optional carry handle

Technical Data

- Mains connection: 1~230V / 50 Hz
- Protection Class: IP-55
- Fluid temperature maximum: 35°C
- Self-priming up to 8 metres
- Adjustable cut-in pressure (1.0 – 3.0 bar)
- Mechanical pressure gauge fitted to site of fluid control

Material

- Pump Housing: 304 Stainless Steel
- Impeller: 304 Stainless Steel
- Stage Chambers: Noryl
- Diffuser/Injector: Noryl
- Mechanical Seal: Carbon / Ceramic
- Elastomers: EPDM



Model	Power (P2 kW)	Pump Shut off Head (m)	No. of taps	Nominal Duty (lpm @ m)	V / Ph / Hz	Weight (kg)
FWJ 202	0.65 kW	36	Four (4)	38 lpm @ 21.1 m	240 / 1 / 50	12.7
FWJ 203	0.75 kW	41	Six (6)	58 lpm @ 21.1 m	240 / 1 / 50	13.1
FWJ 204	1.1 kW	48	Seven (7)	74 lpm @ 21.1 m	240 / 1 / 50	14.4